


A course in electrical engineering Volume 2

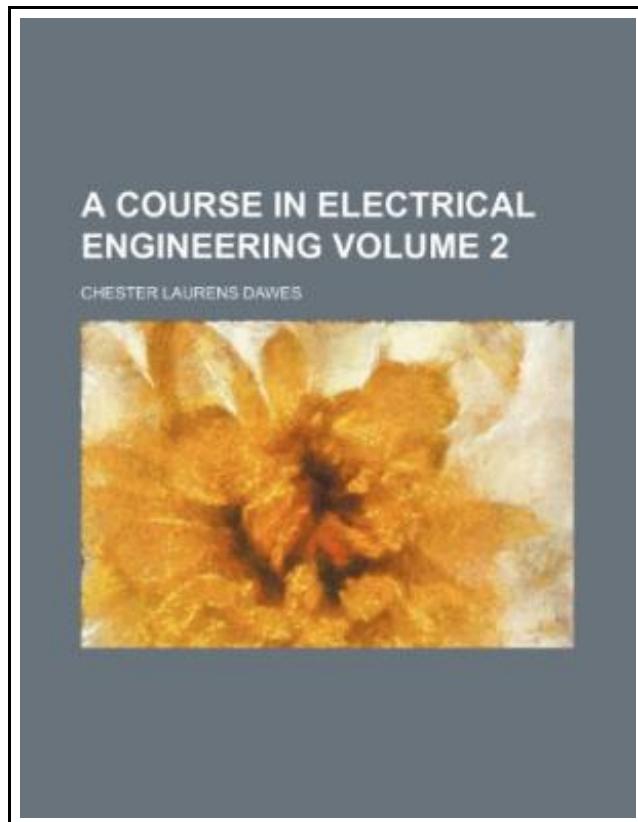

Filesize: 8.68 MB

Reviews

*A whole new eBook with a brand new perspective. it was actually written quite completely and useful. I found out this ebook from my dad and i recommended this ebook to discover.
(Dr. Wyatt Morissette)*

A COURSE IN ELECTRICAL ENGINEERING VOLUME 2

[DOWNLOAD](#)

To read **A course in electrical engineering Volume 2** PDF, remember to refer to the hyperlink beneath and save the file or gain access to other information that are relevant to A COURSE IN ELECTRICAL ENGINEERING VOLUME 2 book.

RareBooksClub. Paperback. Book Condition: New. This item is printed on demand. Paperback. 140 pages. Dimensions: 9.7in. x 7.4in. x 0.3in. This historic book may have numerous typos and missing text. Purchasers can download a free scanned copy of the original book (without typos) from the publisher. Not indexed. Not illustrated. 1922 Excerpt: . . . the secondary and primary resistances, respectively, as a one-to-one ratio of rotor to stator turns is assumed. Line PG is then drawn. At any load current I_2 (PE) is the secondary current, being equal to $I_1 - I_0$ vectorially. EA is the energy component of the current I_1 , and therefore the total power input per phase, $P_i = EA \times V$. The core and friction losses $P_c = BA \times V$ per phase. The primary copper loss $I_1^2 R_1$ $BC \times V$ per phase. The secondary copper loss $I_2^2 R_2$ $CD \times V$ per phase. The output $P_o = DE \times V$ per phase. Draw PG parallel to PG and tangent to the circle at E. Break-down torque $T_B = CE$ (to scale). The above diagram is drawn for but one phase of the motor. The values of power, losses, and torque must be multiplied by n if the motor has n phases. The torque scale may be found as follows: The torque is equal to a constant times the power, divided by the speed, the value of the constant depending on the units adopted. The power output per phase is $P_o = V \times DE$. The rotor speed $N_2 = N(1-s)$ where N is the synchronous speed in r. p. m. $CD = N(CE-CD) / N$. $CD = CE - CE$. The torque developed per phase K is $CE \times V \times C_z$ where C_z is the total power per phase delivered to the rotor. The total power delivered to the rotor by n phases, $P_o = n \times CE \times V \times C_z$.

[Read A course in electrical engineering Volume 2 Online](#)[Download PDF A course in electrical engineering Volume 2](#)

Other PDFs



[PDF] The Whale Tells His Side of the Story Hey God, Ive Got Some Guy Named Jonah in My Stomach and I Think Im Gonna Throw Up

Follow the web link beneath to download "The Whale Tells His Side of the Story Hey God, Ive Got Some Guy Named Jonah in My Stomach and I Think Im Gonna Throw Up" PDF file.

[Save Document »](#)



[PDF] God Loves You. Chester Blue

Follow the web link beneath to download "God Loves You. Chester Blue" PDF file.

[Save Document »](#)



[PDF] Animalogy: Animal Analogies

Follow the web link beneath to download "Animalogy: Animal Analogies" PDF file.

[Save Document »](#)



[PDF] Yearbook Volume 15

Follow the web link beneath to download "Yearbook Volume 15" PDF file.

[Save Document »](#)



[PDF] Molly on the Shore, BFMS 1 Study score

Follow the web link beneath to download "Molly on the Shore, BFMS 1 Study score" PDF file.

[Save Document »](#)



[PDF] Good Night, Zombie Scary Tales

Follow the web link beneath to download "Good Night, Zombie Scary Tales" PDF file.

[Save Document »](#)